


USZ 88-1450/2300

TYP/TYPE	A		B		Q (m ³ /min)		M (kW)		Weight (kg)	
	min.	max.	min.	max.	with PSA	without PSA	min.	max.	min.	max.
USZ 88-1450/2300	3060	3480	6280	6700	23 000	23 000	355	600	11 500	12 200

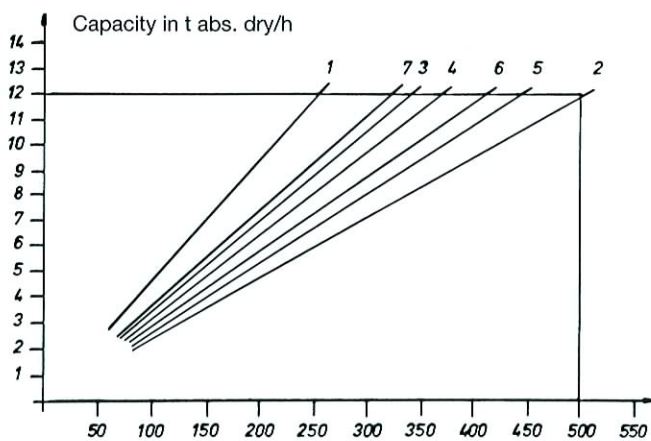

Characteristic No.	Raw material	to flakes for
1	Homogenization of wet flakes	Core material
2	Pretreated wet flakes	Surface material
3	Sawdust, dry planer shavings	Very fine surface material
4	Wet chips	Core material
5	Dry flakes and coarse material	Very fine surface material
6	Semi-moist bark, i.e. 20-50% moisture from abs. dry	Briquetting Blow firing
7	Waste wood chips	Core material or fuel chips